


ZIP-LOK

ZIP-LOK 1½" Standing Seam Panel

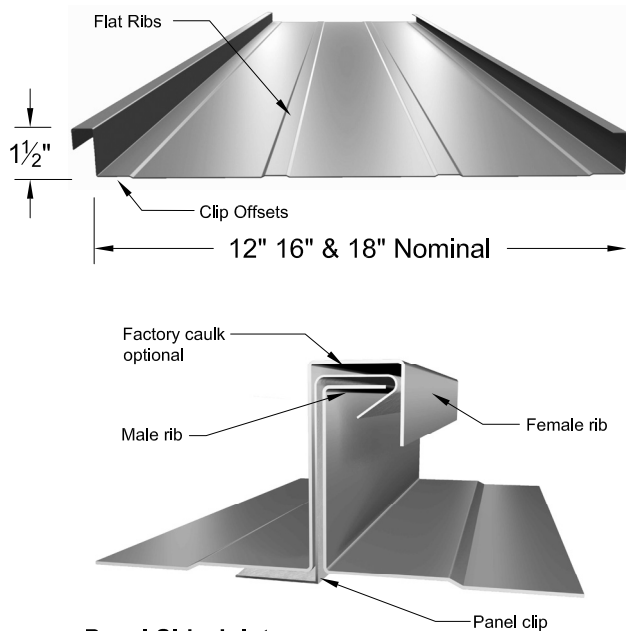

Panel Side Joint

Mechanically Seamed for weathertightness and resistance to wind uplift.

Applications

Structural roofing on slopes 1" per foot or greater. Continuous lengths without panel laps. Vertical walls, radius barrels and conical tapers (conical panels not available with ribs or clip offsets).

Substrates

Open purlin / Re-Roof Framing / Plywood / Metal Deck

Materials

Materials	Standard Gauges
Aluminum (3000 alloy).....	.032" .040"
Galvanized coated steel (G-90).....	24 ga. 22 ga.
Alum-Zinc coated steel (AZ-50 & AZ-55).....	24 ga. 22 ga.
Copper & lead coated Copper.....	16 oz. 20 oz.
Zinc & Pre-Weathered Zinc7mm .9mm

Finishes

Kynar & Metallic Fluoropolymer Coatings
Mill Finish, Brushed, Anodized
Texture: Smooth or Stucco Embossed


Manufacturing

Factory or Site Roll Formed


Testing / Agency Approvals

UL-580 Tested UL Listed Class 90 Construction #619
ASTM E-283 Tested ASTM E-331 Tested

Components

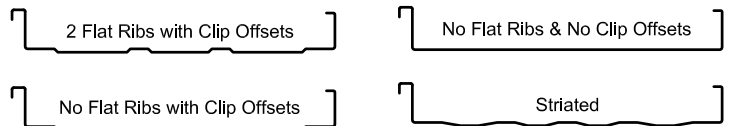


Some panels configurations are not suitable for all applications. Contact sales & engineering for more information.



#15SC Sliding Clip

Allows for thermal expansion of the panel system.



#15ZC Ridge/Hip Z Closure

Made from the same material required for the project. Supplied in 10'-0" lengths.





#15GC Continous Gable/Endwall Clip

Supplied in 10'-0" lengths.


S-5-U HD Clamp

Aluminum block for use with S-5!™ snow retention system and for other practical purposes.



#15FC Fixed Clip

For the fix point of the panel, or shorter panel lengths. (panels with clip offsets only)





#15MS Mechanical Seamer Tool

To mechanical seam a single or double lock panel. Available for Rent or Purchase.



S-5!™ ColorGard Snow Retention System

Refer to PS-12 for more information.

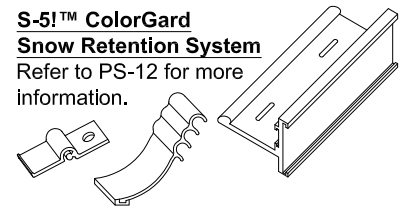

#33BP Punched Bearing Plate

16 ga. 3" x 3" galvanized. For clip support over rigid insulation.

