

"Flush-Lock" Series 311 Soffit & Wall Panel

Applications

Concealed fastener panel for soffit, vertical walls and fascias.

Substrates

Solid or plywood Wood or metal framing system

Materials

Aluminum (3000 series alloy) .032" .040" .050
 Galvanized coated steel (G-90) 24 ga. 22 ga. 20 ga.
 Alum-Zinc coated steel (AZ-50 & AZ-55) 24 ga. 22 ga. 20 ga.
 Also available in Zinc, Pre-Weathered Zinc,
 Stainless Steel, Copper & Lead Coated Copper




Standard Gauges

Finishes


Kynar & Metallic Fluoropolymer Coatings
 Mill Finish, Brushed, Anodized
 Texture: Smooth or Stucco Embossed

Manufacturing

Factory Roll Formed

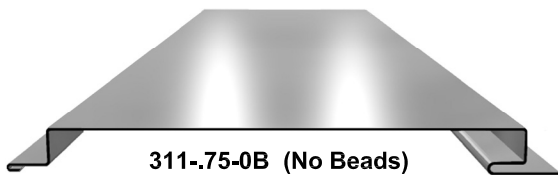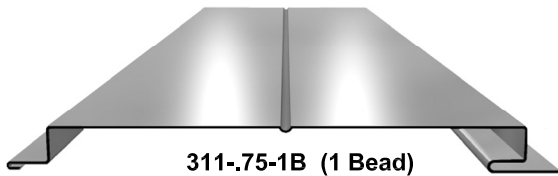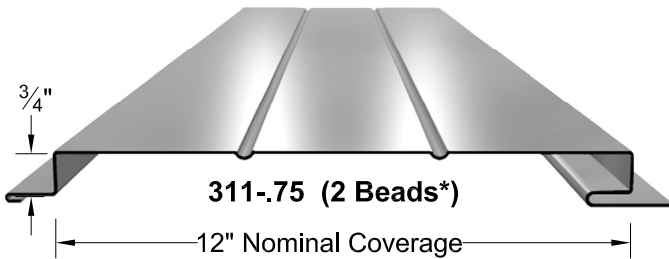


Model #	Description
* 311-.75	2 Beads (Standard Panel)
311-.75-1L	2 Beads + 1 Lanced Strip
311-.75-2L	2 Beads + 2 Lanced Strips
311-.75-3L	2 Beads + 3 Lanced Strips
311-.75-1B	1 Bead
311-.75-1B-1L	1 Bead + 1 Lanced Strip
311-.75-1B-2L	1 Bead + 2 Lanced Strip
311-.75-0B	NO Beads
311-.75-0B-1L	NO Beads + 1 Lanced Strip
311-.75-0B-2L	NO Beads + 2 Lanced Strips
311-.75-0B-3L	NO Beads + 3 Lanced Strips



Vented (Lanced) panels available in select materials. Consult factory for more information.

Typical Applications (Plan Details)

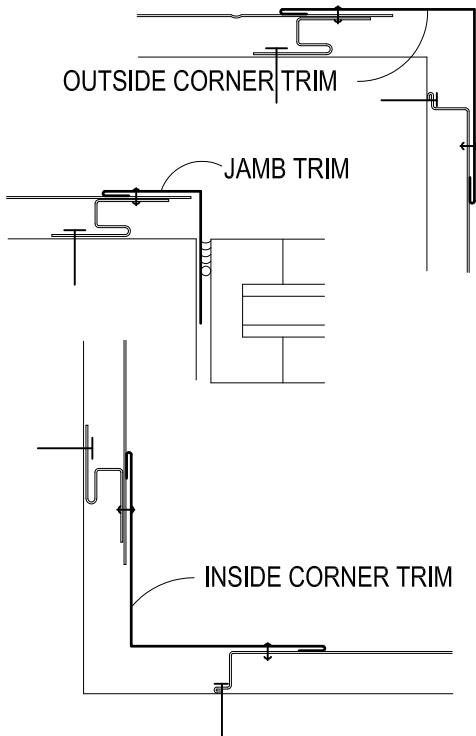

Flush Panel Joint



Consult Merchant & Evans for length limitations.
 * Standard profile is manufactured with 2 beads.

Typical Applications (Section Details)

