



#311-12 x 1½" Flush Seam Panel

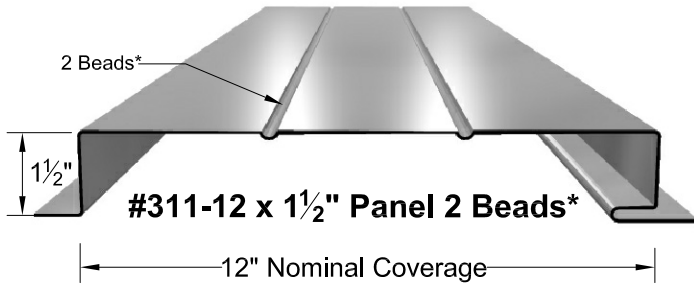

* Standard profile is manufactured with 2 beads.

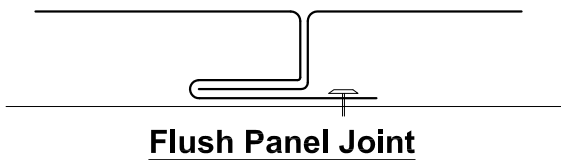

Applications

Concealed fastener panel for soffit, vertical walls and fascias.
 Brake formed lengths up to 21'.

Substrates

Solid or plywood Wood or metal framing system

Materials

Aluminum (3000 series alloy) .032" .040" .050
 Galvanized coated steel (G-90) 24 ga. 22 ga. 20 ga.
 Alum-Zinc coated steel (AZ-50 & AZ-55) 24 ga. 22 ga. 20 ga.
 Also available in Zinc, Pre-Weathered Zinc,
 Stainless Steel, Copper & Lead Coated Copper

Standard Gauges


Finishes

Kynar & Metallic Fluoropolymer Coatings
 Mill Finish, Brushed, Anodized
 Texture: Smooth or Stucco Embossed

Manufacturing


Factory Formed

Some panels configurations are not suitable
 for all applications. Contact sales &
 engineering for more information.

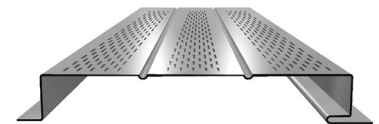

Vented (Lanced) panels available in select materials. Consult factory for more information.

Typical Applications (Plan Details)

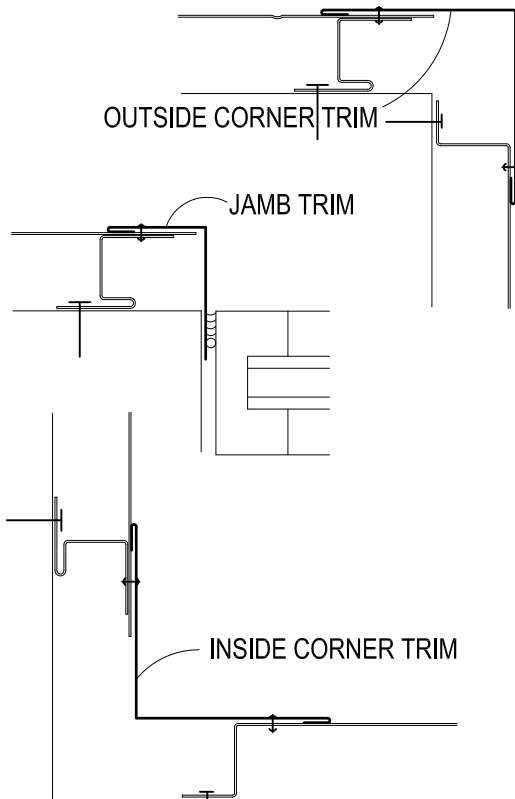

Typical Applications (Section Details)

