
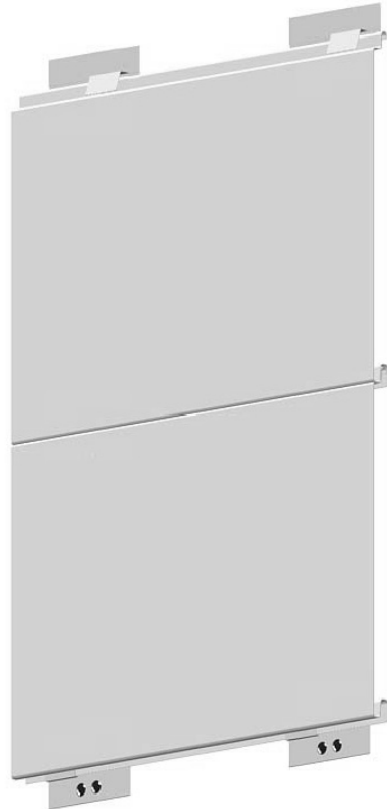
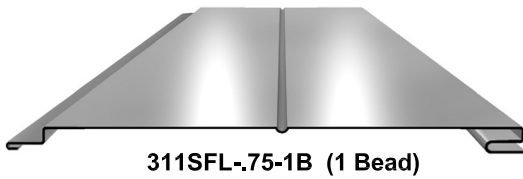


"SUPER Flush-Lock" Series 311 Soffit & Wall Panel

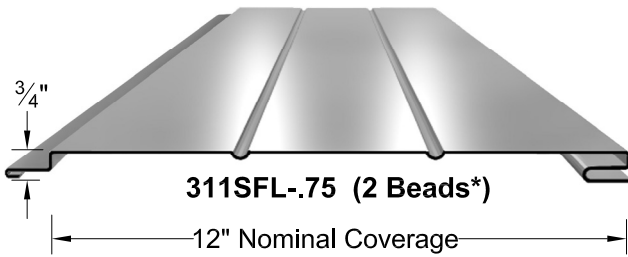

Applications

Designed for high wind loads and for ease of removal & replacement of individual panels when necessary. Concealed clip panel for soffit, vertical walls and fascias.

Substrates

Solid or plywood Wood or metal framing system

Materials

Aluminum (3000 series alloy) .032" .040" .050
 Galvanized coated steel (G-90) 24 ga. 22 ga. 20 ga.
 Alum-Zinc coated steel (AZ-50 & AZ-55) 24 ga. 22 ga. 20 ga.
 Also available in Zinc, Pre-Weathered Zinc, Stainless Steel, Copper & Lead Coated Copper

Standard Gauges


Finishes

Kynar & Metallic Fluoropolymer Coatings
 Mill Finish, Brushed, Anodized
 Texture: Smooth or Stucco Embossed

Manufacturing


Factory Roll Formed

Model #	Description
* 311SFL-.75	2 Beads (Standard Panel)
311SFL-.75-1L	2 Beads + 1 Lanced Strip
311SFL-.75-2L	2 Beads + 2 Lanced Strips
311SFL-.75-3L	2 Beads + 3 Lanced Strips
311SFL-.75-1B	1 Bead
311SFL-.75-1B-1L	1 Bead + 1 Lanced Strip
311SFL-.75-1B-2L	1 Bead + 2 Lanced Strip
311SFL-.75-0B	NO Beads
311SFL-.75-0B-1L	NO Beads + 1 Lanced Strip
311SFL-.75-0B-2L	NO Beads + 2 Lanced Strips
311SFL-.75-0B-3L	NO Beads + 3 Lanced Strips

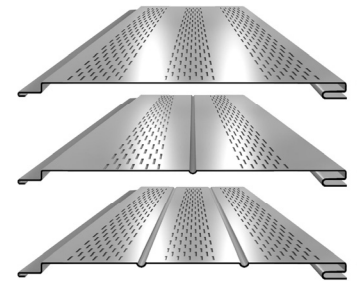

Consult Merchant & Evans for length limitations.
 * Standard profile is manufactured with 2 beads.

Vented (Lanced) panels available in select materials. Consult factory for more information.

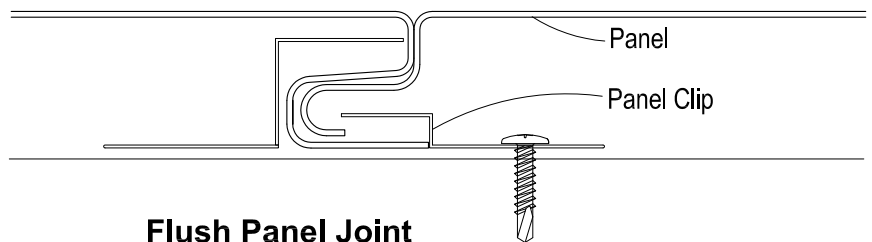

Flush Panel Joint

